


State	Proj. No.	Sheet No.
MO		



SWEDGE ANCHOR
BOLT DETAIL

GENERAL NOTES:



Anchor bolts for Type "C" bearings shall be 1" Ø ASTM A709 Grade 50W steel swaged bolts, with no heads or nuts and shall extend 10" into the concrete. Swedging shall be 1" less than the extension into the concrete. Anchor bolts shall be set during the placing of concrete or grouted in the anchor bolt wells prior to the erection of steel. The top of anchor bolts shall be set approximately 1/4" below the top of bearing.

Anchor bolts shall be coated with a minimum of two coats of inorganic zinc primer (5 mils minimum).

Weight of the anchor bolts for bearings shall be included in the weight of the Fabricated Structural Steel.

"☺" Indicates machine finish surface.

Shop drawings are not required for the lead plates and/or the preformed fabric pads.

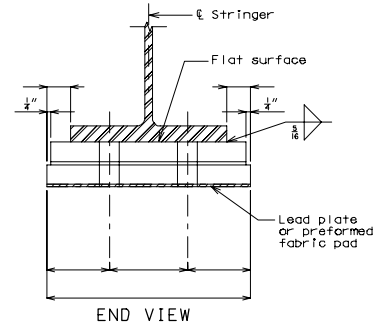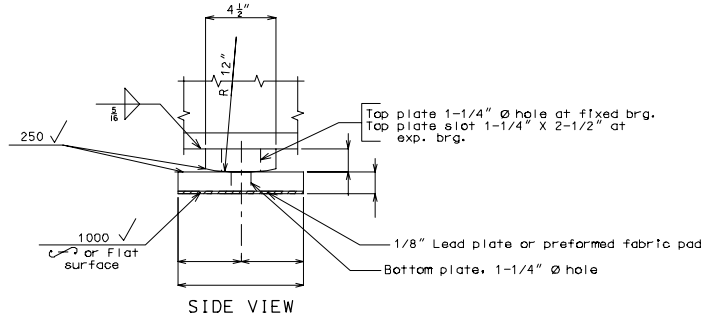

TYPE "C" BEARINGS

(Estimated Weight pounds)

CREATED IN
MICROSTATION